

Air to Water Heat Exchanger



Description


Order Number:	2130210
Brand Name:	SLIMLINE HEX
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection:	IP 55
Approvals:	CE, cURus

Technical data

Cooling capacity 95F/W50F (53 GPH):	10,750 BTU
Cooling capacity 95F/W50F (132 GPH):	14,160 BTU
Refrigerant / GWP:	Water, light oils or similar
Coolant:	Water, light oils or similar
Operating temperature range:	+34°F - +162°F
Air volume flow (system / unimpeded):	723 / 1340 m ³ /h
Mounting:	Wall mounted / internal
Dimension H x W x D:	37.4 x 15.7 x 7.1 inch
Weight:	37.5 lbs.
Voltage / Frequency:	400 V ~ 50/60 Hz 2~
Starting current:	0.75 / 0.81 A
Max. current:	0.4 / 0.65 A
Max. power:	160 / 240 W
Pressure water circuit:	10 bar
Water connection:	Rp 1/4" - inside thread with 2 connectors for pipe internal diameter of 0.39 in.
Fuse:	2 A (T)
Connection:	3 - pole terminal for alarms 4 - pole terminal for power

Air flow:

Cut out dimensions:

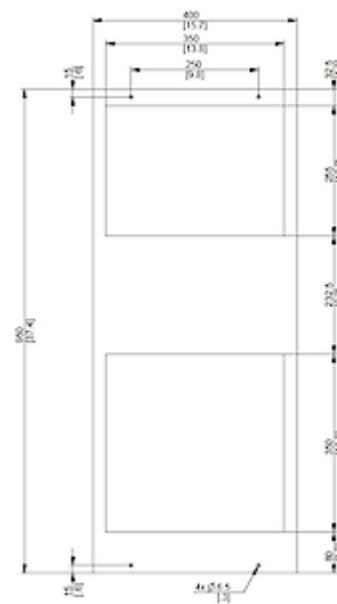

Order Information

Stainless steel housing part no.	21302102
Mit Magnetventil Bestell Nr.	2130200
Taric code	84158300