

Chiller



Description


Order Number:	200501001001
Brand Name:	SoliTherm Chill
Colour:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress Protection:	IP 44
Approvals:	CE

Technical Data

Cooling capacity L35W18:	440 W
Capacity control:	ON / OFF
Refrigerant / GWP:	R134a / 1430
Coolant:	Water, water / glycol mixtures, or similar
Coolant flow rate:	5 l/min @ 1.5 bar
Coolant tank volume:	4 l
Operating temperature range (liquid):	10°C - 25°C
Operating temperature range (ambient):	10°C - 50°C
Air flow unimpeded:	285 m³/h
Mounting:	Free standing on castor wheels
Dimensions A x B x C (D+E):	476 x 430 x 405 mm
Weight:	30 kg
Voltage / Frequency:	230 V ~ 50/60 Hz
Starting current:	7 A
Max. current:	2.9 / 2.9 A
Max. power:	600 / 670 W
Pressure water circuit:	4 bar
Water connection:	G1/4" female
Connection:	Power - IEC-60320 C14 male Control - M12 male, A-coded

Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview Product Group Chillers](#)

Performance graph:

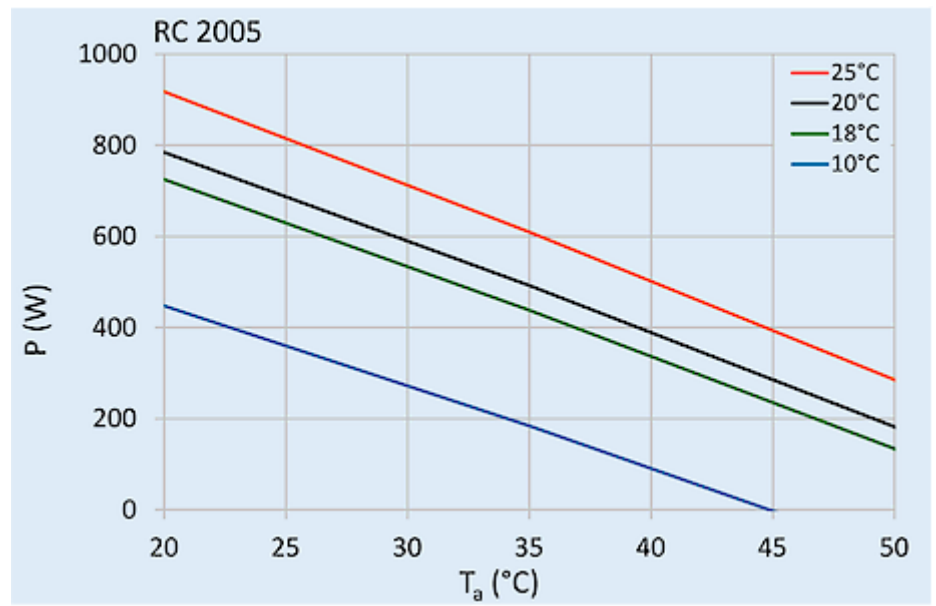

[click image to enlarge](#)