

## Outdoor cooling unit OC 4109-230V



### Product Features


<b>Brand Name:</b>	SoliTherm Outdoor
<b>Order Number:</b>	4109000
<b>Housing Material:</b>	Aluminum
<b>Ingress protection:</b>	IP 55
<b>Approvals:</b>	CE, cURus, RoHS
<b>Taric Code:</b>	84158200

## Technical data OC 4109-230V

<b>Cooling capacity L35L35:</b>	1.50 kW @ 50 Hz 1.52 kW @ 60 Hz
<b>Cooling capacity L35L50:</b>	900 W @ 50 Hz 920 W @ 60 Hz
<b>Compressor:</b>	Rotary piston compressor
<b>Refrigerant / GWP:</b>	R134a / 1430
<b>Refrigerant charge:</b>	500 g / 18 oz
<b>High / low pressure:</b>	27 / 6 bar 400 / 88 psig
<b>Temperature range:</b>	+10°C - +50°C
<b>Air volume flow (system / unimpeded):</b>	Ambient air circuit: 480 / 688 m <sup>3</sup> /h Cabinet air circuit: 360 / 850 m <sup>3</sup> /h
<b>Mounting:</b>	Internal
<b>Dimension H x W x D:</b>	1,025 x 466.5 x 157 mm
<b>Weight:</b>	30 kg
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>Current L35L35:</b>	3.3 A @ 50 Hz 2.6 A @ 60 Hz
<b>Starting current:</b>	15.5 A
<b>Max. current:</b>	4.0 A
<b>Nominal power L35L35:</b>	710 W @ 50 Hz 730 W @ 60 Hz
<b>Max. power:</b>	850 W
<b>Fuse:</b>	2 x 10 A (T)
<b>Connection:</b>	Connection terminal block

Please click on the graphics to download.  
 More CAD drawings can be found under [Product Download](#).  
 > [Overview product group Cabinet cooling units - Outdoor](#)

**Performance Graph:**

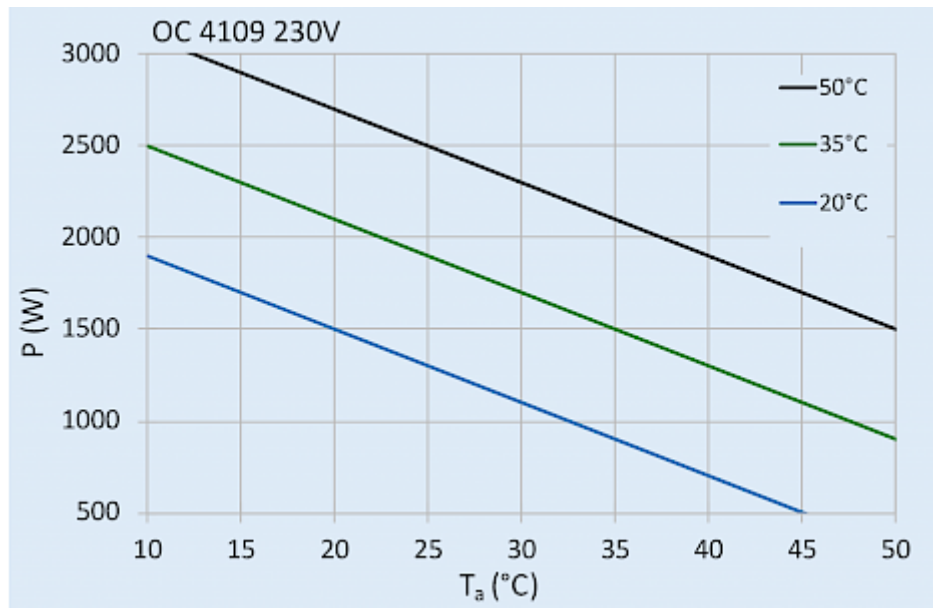

[click image to enlarge](#)

**Cut out dimensions:**



[click image to enlarge](#)