

Cooling unit NEMA / type 4X



Description

Order Number:	57090162
Brand Name:	Compact Outdoor
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress Protection:	IP 56 / Type 12, 3, 3R, 4, 4X
Approvals:	CE, cURus, cULus
UL File Number:	cURus (SA32278), cULus (E498756)


Technical Data

Cooling capacity L35L35:	850 W @ 50 Hz 880 W @ 60 Hz
Cooling capacity L35L50:	610 W @ 50 Hz 660 W @ 60 Hz
Enclosure heater:	400 W
Compressor type:	Reciprocating compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	195 g / 6.9 oz
High / low Pressure:	30 / 6.1 bar 435 / 88 psig
Operating Temperature Range:	-40°C - +55°C
Air flow volume (system / unimpeded):	Ambient air circuit: 410 / 850 m³/h Cabinet air circuit: 200 / 250 m³/h
Mounting:	Wall mounted
Dimensions A x B x C (D+E):	830 x 304 x 270 mm
Weight:	32 kg
Cut out dimensions:	635 x 275 mm
Voltage / Frequency:	230 V ~ 50/60 Hz
UL Voltage / Frequency:	230 V ~ 60 Hz
Current L35L35:	3.0 A @ 50 Hz 3.2 A @ 60 Hz
Starting current:	15 A
Max. current:	3.8 A
Nominal power L35L35:	530 W @ 50 Hz 610 W @ 60 Hz
Max. power:	870 W
Fuse:	6 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).
> [Overview Product Group COMPACT OUTDOOR - OLD](#)

Performance graph:

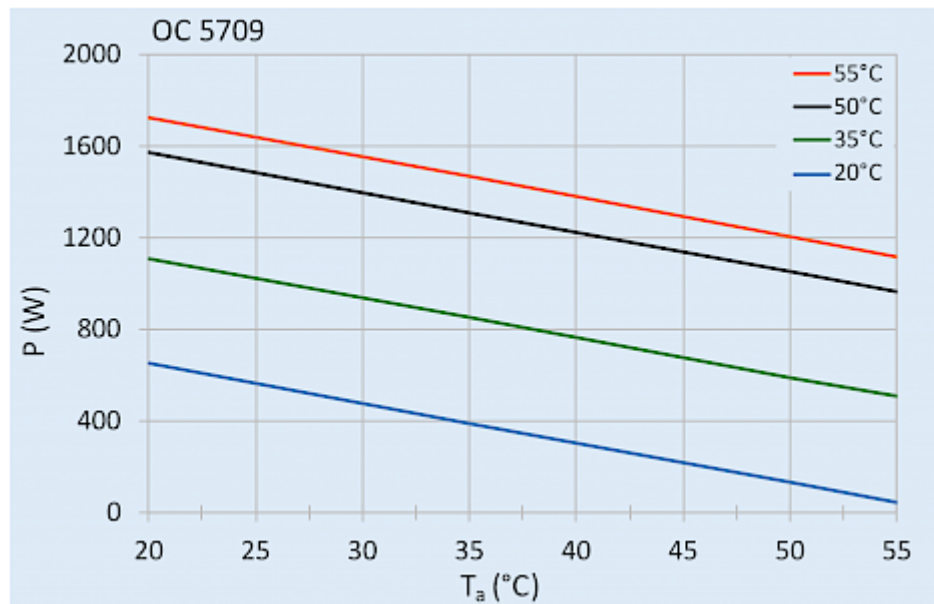

click image to enlarge

Cut Out Dimension:



click image to enlarge

Order Information

In stainless steel 304 (V2A) part no.	57090062
In stainless steel 316 (V4A) part no.	57090064
In stainless steel 304 (V2A) with 400 W enclosure heater part no.	57090162
In stainless steel 316 (V4A) with 400 W enclosure heater part no.	57090164
Box dimensions	870 x 348 x 310 mm
Gross weight	34 kg
Taric code	84158200