

Outdoor air conditioner




Description

Order Number:	572620001
Brand Name:	Compact Outdoor
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection:	TYPE 12, 3, 3R, 4
Approvals:	CE, cURus, cULus
UL File Number:	cURus (SA32278), cULus (E498756)


Technical data

Cooling capacity 95F/95F:	8530 BTU @ 50 Hz 8530 BTU @ 60 Hz
Cooling capacity 95F/122F:	6720 BTU @ 50 Hz 6960 BTU @ 60 Hz
Compressor type:	Rotary piston compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	950 g / 33.5 oz
High / low pressure:	29.3 / 6.1 bar 425 / 88 psig
Operating temperature range:	-40°F - 131°F
Air volume flow (system / unimpeded):	Ambient air circuit: 450 / 706 cfm Cabinet air circuit: 560 / 706 cfm
Mounting:	Wall mounted
Dimension H x W x D:	61 x 18 x 14 inch
Weight:	176 lbs.
Voltage / Frequency:	400/460 V - 50/60 Hz 2~
UL Voltage / Frequency:	400/460 V ~ 60 Hz 2~
Current 95F95F:	2.9 A @ 50 Hz 2.6 A @ 60 Hz
Starting current:	6.1 A / 6.8 A
Max. current:	3.6 A / 3.2 A
Nominal power 95F95F:	940 W @ 50 Hz 1.18 kW @ 60 Hz
Max. power:	1,30 kW @ 50Hz 1,64 kW @ 60 Hz
Fuse:	2 x 9 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block

Performance graph:

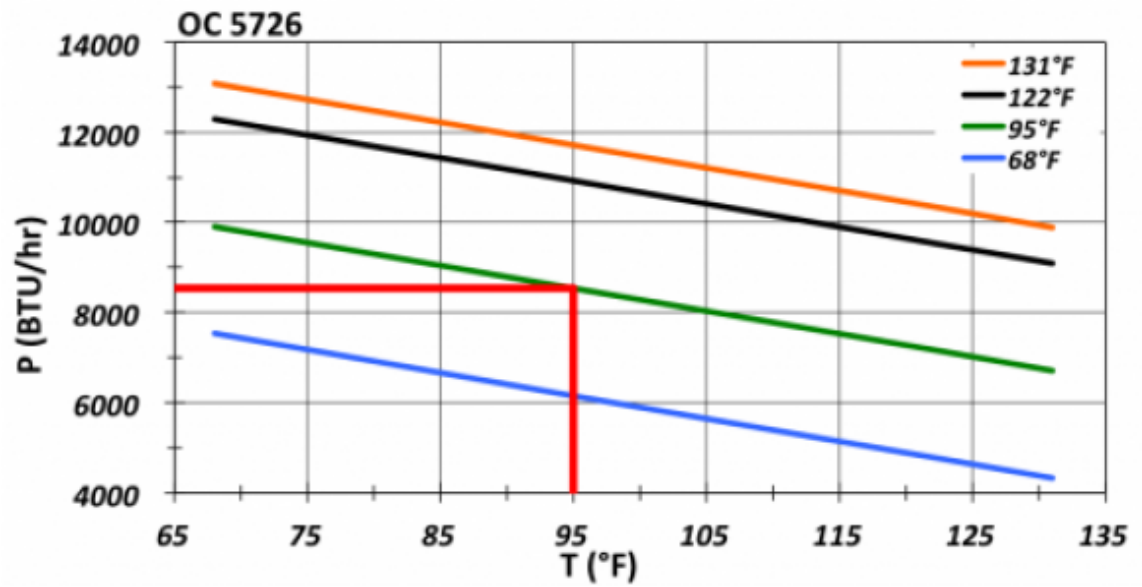

Cut out dimensions:

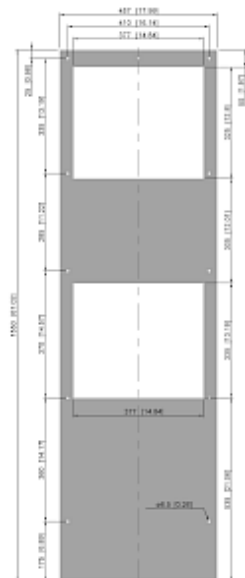

Order Information

Ohne 1500 W Schaltschrankheizung Bestell Nr.	572620001
With 1,500 W enclosure heater part no.	572621001
Box dimensions	1,590 x 503 x 395 mm
Gross weight	84 kg
Taric code	84158200